


11-15-00

A

11/14/00  
JC887 U.S. PTO

09742803 44400

Please type a plus sign (+) inside this box  Approved for use through 10/31/2002. OMB 0651-0032  
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b>  (Only for new nonprovisional applications under 37 CFR 1.53(b))	Attorney Docket No.	KCX-117 (14096)
	First Inventor	Margaret M. Ward, et al
	Title	ENHANCED MULTI-PLY TISSUE...
	Express Mail Label No.	EL471682484US

APPLICATION ELEMENTS	ADDRESS TO:
See MPEP chapter 600 concerning utility patent application contents.	Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input type="checkbox"/> Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)	7. <input type="checkbox"/> CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)
2. <input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.	8. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
3. <input checked="" type="checkbox"/> Specification [Total Pages 27] (preferred arrangement set forth below)	a. <input type="checkbox"/> Computer Readable Form (CRF)
- Descriptive title of the invention	b. Specification Sequence Listing on:
- Cross Reference to Related Applications	i. <input type="checkbox"/> CD-ROM or CD-R (2 copies); or
- Statement Regarding Fed sponsored R & D	ii. <input type="checkbox"/> paper
- Reference to sequence listing, a table, or a computer program listing appendix	c. <input type="checkbox"/> Statements verifying identity of above copies
- Background of the Invention	
- Brief Summary of the Invention	
- Brief Description of the Drawings (if filed)	
- Detailed Description	
- Claim(s)	
- Abstract of the Disclosure	
4. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 3]	
5. Oath or Declaration [Total Pages ]	
a. <input type="checkbox"/> Newly executed (original or copy)	
b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63 (d)) (for continuation/divisional with Box 17 completed)	
i. <input type="checkbox"/> <b>DELETION OF INVENTOR(S)</b> Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).	
6. <input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76	


ACCOMPANYING APPLICATION PARTS	
9. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))	
10. <input type="checkbox"/> 37 CFR 3.73(b) Statement (when there is an assignee)	<input type="checkbox"/> Power of Attorney
11. <input type="checkbox"/> English Translation Document (if applicable)	
12. <input checked="" type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449	37 Copies of IDS Citations
13. <input type="checkbox"/> Preliminary Amendment	
14. <input type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)	
15. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)	
16. <input checked="" type="checkbox"/> Other: Express Mail Certificate of Mailing	


17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_ Group I Art Unit \_\_\_\_\_

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

18. CORRESPONDENCE ADDRESS					
<input type="checkbox"/> Customer Number or Bar Code Label				or <input type="checkbox"/> Correspondence address below	
(Insert Customer No. or attach bar code label here)					
Name	John E. Vick, Jr.				
	Dority & Manning, P.A.				
Address	P.O. Box 1449				
City	Greenville,	State	SC	Zip Code	29602
Country	USA	Telephone	864-271-1592	Fax	864-233-7342

Name (Print/Type)	John E. Vick, Jr.	Registration No. (Attorney/Agent)	33,808
Signature			Date Nov. 10, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

**DOCKET NO: KCX-117 (14096)**

**UNITED STATES PATENT APPLICATION**

**FOR**

**ENHANCED MULTI-PLY TISSUE PRODUCTS**

**OF**

**MARGARET M. WARD**

**GARY SHANKLIN**

**CYNTHIA W. HENDERSON**

**AND**

**MICHAEL PAYNE**

DOCKET 14096

DOCKET NO.: KCX-117 (14096)**ENHANCED MULTI-PLY TISSUE PRODUCTS****Background of the Invention**

Absorbent products such as paper towels, industrial wipers, baby wipers, tissue, food service wipers, and the like are designed to provide several important properties. For example, the products should have good bulk characteristics and a soft feel. The products should be highly absorbent to fluids, including bodily fluids. In many cases, the products need good strength even after they become wet. Some products require a high resistance to tearing. Small changes in the structure or manufacturing processes of such products can provide a profound impact on the ultimate sensation to the user. Attempts have been made in the past to enhance and increase the physical characteristics of multi-ply tissue products.

One advantage of providing a multi-ply product as opposed to a single ply product is that different plies may provide different properties to the overall product. For example, disposable absorbent articles such as diapers may have a permeable first ply such as a liner in a diaper, an absorbent middle ply such as an absorbent core, and an impermeable outer ply such as a cover or backsheet. In contrast to diaper products, tissue products customarily have comprised two or three permeable plies of material. Some of the most popular tissue products on the market today include multiple plies for enhanced softness and thickness. For example, some of the premium tissues currently sold in the United States have three plies, all of which generally are structurally equivalent and equally permeable. That is, in many tissues multiple plies are provided which are essentially the same and are combined together to form a single multi-ply tissue. Typically, tissues in the prior art have plies that

are structurally similar. However, some tissue products are known to have existed with heterogeneous (dissimilar) plies. Heterogeneous plies are used to accomplish several objectives in the tissue industry, such as, enhancement of strength without a reduction in softness. In some cases, heterogeneous plies can provide a mechanism to bury or separate potentially harsh or irritating substances into the center of the tissue, thereby preventing irritation to the user at the surface of the tissue. See, for example, U.S. Patent No. 4,738,847 to Rothe et al. In some cases, a multi-ply structure has been used to provide an absorbent core in the center of the tissue, such as provided in U.S. Patent No. 5, 437,908 (Demura et al.).

At least one known disclosure is directed to forming a tissue product or laminate from two dissimilar paper webs. See, U.S. Patent No. 4,100,017 (Flautt, Jr.). The Flautt patent describes a web of low density, high bulk process paper united with a web of conventional paper. Variations described in the Flautt disclosure include using two paper webs having different creping characteristics to form the laminated sanitary tissue. It is quite possible that such a structure would be useful for an end product such as a paper towel.

Several recent United States patents disclose multi-ply tissues in which a ply includes relatively low density regions dispersed throughout a relatively high density continuous network. See U.S. Patents 5,830,558; 5,906,711; and 5,919,556 each issued on behalf of inventor Steven Lee Barnholtz. The stated goal of such heterogeneous tissues is increased absorbency. Barnholtz discloses a three ply tissue structure in which a center or middle ply comprises a more dense, thinner ply. See for example Figures 2A and 2B of each patent. The center ply is thinner than the outer plies, and it is generally more compact and more dense than the outer plies. See United States Patent No. 5,906,711; column 9, lines 28-36.

One problem with tissues having a thin, dense and compact middle ply is that such tissues tend to lack the superior softness that is desired by consumers. Further, the bulk and resiliency of tissues having a thin and dense middle ply is less than desirable. A thin, dense middle  
5 ply does not provide the smooth, bulky, resilient feel that consumers prefer in tissues of this type.

What is needed in the industry is a multi-ply paper product or tissue that is durable and soft having increased resiliency and enhanced substance in hand. Further, a tissue with a thicker middle ply, and a less  
10 dense (i.e. more bulky) middle ply is desirable. Furthermore, it is highly desirable to provide a product having multiple plies in which middle plies of the tissue are structurally or chemically enhanced to improve products functional performance, e.g. doesn't tear, shred or fall apart in use. A strong tissue that is also soft would be a substantial improvement over  
15 the art. Higher bulk, less dense and thicker middle layers provide advantages to the overall feel of tissues. Further, it would be desirable to find a way to store a substance within a tissue, and then enable release of the substance at a later time.

### **Summary of the Invention**

In one embodiment of the invention there is provided a tissue having superior tactile properties and greater bulk characteristics. Surprisingly, it has been discovered that certain mechanical or chemical modifications to individual plies within a multi-ply tissue can lead to  
25 improved tissues having greater bulk and tactile effects to the user. A tissue having a thickened middle ply with less density and greater bulk is disclosed.

A method of manufacturing a tissue having three plies with chemical enhancement is another embodiment of the invention. At least  
30 one embodiment comprises a multi-ply tissue comprising a plurality of

plies wherein one ply is structurally different from at least one of the other plies. In many cases, the tissue will be manufactured using conventional tissue manufacturing technology as further described below.

5 In one embodiment the invention comprises a tissue having three plies, comprising a sandwich-type structure having a permeable first outer ply, a middle ply lying adjacent the outer ply and a second outer ply, the second outer ply lying adjacent the middle ply. In the tissue, the middle ply is thickened as compared to the outer plies. Further, in some  
10 embodiments, the middle ply provides enhanced tactile sensation in the composite tissue structure. Thus, the tissue may be more bulky, soft, or fragrant, or may impart other chemical advantages to the user, depending upon how the tissue is treated in subsequent steps. Further, the tissue has a less dense, fluffed or more highly bulked middle ply in  
15 some embodiments.

In other embodiments, the tissue may include chemical alterations associated with the thickened middle ply. In one embodiment, a thickened middle ply may be provided which comprises secondary fiber, Coform or curled fibers. In other embodiments, the middle plies contain  
20 activated carbon or foam. Many different materials may be provided in the middle ply to increase bulk and reduce the density of the tissue, facilitating increased absorbency, resulting in a more substantial and resilient tissue product. In one embodiment, the tissue of the middle ply comprises a foam. In other embodiments, the tissue may include  
25 chemical alterations, further wherein the chemical alterations are effected by spraying, printing, embossing, dipping or the like on one or more plies. In one embodiment, chemical alterations during basesheet manufacturing such as wet end addition, or creping additives or by spraying the web on the felt, to one or more plies is provided.

In one aspect of the invention, a tissue having three plies is disclosed and claimed. The three ply tissue has in this instance a permeable first outer ply, a middle ply, and a second outer ply, the second outer ply lying adjacent the middle ply, wherein the middle ply is  
5 between the first outer ply and the second outer ply. A three ply "sandwich" is formed, and the middle ply can be modified in any number of ways to provide more substantial effects to the consumer. The first outer ply, middle ply, and second outer plies are joined to form a tissue having enhanced softness or thickness. Further, the tissue has at least  
10 one ply that is chemically enhanced. For example, one method of such enhancement is by applying activated carbon, and another method involves the application of foam.

In one embodiment, a tissue wherein at least one ply is treated with a tissue enhancer is shown. By tissue enhancer, we mean to refer  
15 to either a chemical or mechanical treatment of the tissue in one of several methods or procedures as described herein, including, for example foam or activated carbon application, or chemical carrying capability. Chemical enhancement refers to a chemical treatment of a tissue using a chemical composition. Each of these enhancers may  
20 provide a unique property to the tissue. In some cases, the tissue additionally comprises an antibacterial or antiviral agent which kills or slows the reproduction of bacteria and viruses and thereby promotes the health of tissue users.

The tissues of this invention can provide a multi-ply tissue having  
25 at least three plies in which the plies that do not comprise an outwardly facing surface of the tissue structure may be composed of relatively coarser material versus the outer plies which are relatively smoother. In some embodiments, the tissue has a middle ply which is noncreped or mechanically altered by various means to provide a thicker tissue.

In some cases, it may be possible to provide plies of tissue that act as chemical carriers, which may transport a chemical substance to a user. Chemical carriers are carried by the plies, and then can be released from the tissue to the user during use. In one aspect of the invention, a soft, multi-ply tissue with smooth outer surfaces and a bulky middle is provided to the user which provides a tactile impression of substance and resilience to the user. Some embodiments of the invention will provide to the user improved fluid absorbency and fluid retention properties.

10

#### **Brief Description of the Drawings**

A full and enabling disclosure of this invention, including the best mode shown to one of ordinary skill in the art, is set forth in the remainder of this specification. The following Figures illustrate the advantages of this invention:

15

Figure 1 is a diagram showing a typical prior art tissue configuration having two dissimilar paper webs combined together;

Figure 2 shows a preferred embodiment of this invention including a three ply tissue structure with smooth tissue plies on the exterior sides of the tissue and a thickened, bulky ply on the interior of the tissue;

20

Figure 3 depicts several variations showing the application of a chemical substance to a selected portion of a tissue.

#### **Detailed Description of the Invention**

It is known that the addition of a third ply to a facial tissue composite structure can provide enhanced softness. In one invention of this application a composite structure is provided with modified plies that enhances the substance and resiliency of the multi ply tissue product. A thickened middle ply having less density and greater bulk is desirable.

30



As seen in the prior art shown in Figure 1, known methods of producing sanitary tissue products include providing laminates formed from two dissimilar paper webs. When a web of low density, high bulk process paper is united with a web of conventional paper, a product having absorbency, softness, flexibility and bulk properties can be achieved. In the prior art, it is known to provide two dissimilar paper webs having different creping characteristics to form the laminated sanitary tissue. In Figure 1, such a multi-ply tissue product 10 is shown comprising a high bulk process paper 12 and conventional paper 13. The two plies are combined to form a multi-ply tissue in such a way that void spaces 11 exist between the two plies. The void spaces provide a tissue with more bulk.

Figure 2 shows one embodiment of this invention. In that Figure, a soft multi-ply tissue with smooth outer surfaces providing a tactile impression of substance and resilience is shown. A middle layer that is thickened is provided, in which the middle layer of this particular embodiment is provided in a corrugated or ridged pattern for enhanced bulk and thickness. The middle ply provides increased bulk and thickness. The combination of smoothness and substance is obtained from a multi-ply structure that comprises at least three plies in the preferred embodiment. The outer surfaces typically are smooth, soft tissue, such as produced by wet pressed tissue making processes (described below).

In Figure 2, improved multi-ply tissue 15 is shown. The improved multi-ply tissue is comprised of first outer ply 16 and second outer ply 18. Sandwiched between the plies 16 and 18 (which are smooth tissue plies) is a thickened middle tissue ply 17, that may be textured. The middle ply 17 provides a less dense, higher caliper ply as compared to the outer plies. In one embodiment, the middle ply is at least 1.3 times greater in thickness or caliper than either of the outer plies.

For purposes of this specification, the caliper is generally the thickness of a single sheet, but measured as the thickness of a stack of 10 sheets and dividing the ten-sheet thickness by 10, wherein each sheet in the stack is placed with the same side up. Caliper is usually expressed in microns. Caliper is measured in accordance with TAPPI test methods T402 "Standard Conditioning and Testing Atmosphere for Paper, Board, Pulp Handsheets and Related Products" which is used by persons of skill in the art of tissue making. Additionally, T411 om-89 "Thickness (caliper) of Paper, Paperboard, and Combined Board" with Note 3 is used to measure Caliper for stacked sheets. Further, the micrometer used for carrying out the T411 om-89 tests is a Bulk Micrometer (Emveco Model 200-A, Newberg, Oregon) having an anvil diameter of 2.221 inches (56.42 millimeters) and an anvil pressure of 132 grams/square inch (2.00 kiloPascals). After the Caliper is measured, the same ten sheets in the stack are used to determine the average basis weight of the sheets.

The bulk of the tissue products of this invention is calculated as the quotient of the Caliper (expressed in microns) divided by the basis weight, expressed in grams per square meter. The resulting Bulk is expressed as cubic centimeters per gram.

Geometric mean tensile strength (GMT) is the square root of the product of the machine direction tensile strength and the cross-machine direction tensile strength. Tensile strength is measured with an Instron tensile tester using a 3 inches jaw width, a 4 inches jaw span, and a crosshead speed of 10 inches per minute. For example, in United States Patent No. 5,935,383, entitled "Method for Improved Wet Strength Paper", measurements are taken in conditions consisting of 50% relative humidity and 72 degrees Fahrenheit for at least 24 hours, with the tensile test run at a crosshead speed of 1 in/min. GMT can be computed from the peak load values of the machine direction (MD) and cross machine

direction (CD) tensile curves. These values are obtained under laboratory conditions of 23.0+/-1.0 degrees Celsius and 50.0+/-2.0 percent relative humidity after the sheet (of tissue) has been equilibrated to the testing conditions for a period of not less than four hours.

5           In the tissue shown in Figure 2, the middle ply may be a flexible, textured, high bulk relative to the outer plies, resilient, may be textured rather than smooth. The finished tissue in one embodiment has a flexible corrugated structure while still providing surface smoothness. A tissue of this type has the ability to "glide" on the skin, while at the same  
10           time providing a high degree of substance in hand and resiliency. The tissue of this type generally has better fluid absorbency and fluid retention properties than prior art tissues.

          In one embodiment, the textured tissue comprises a middle ply with a high degree of external bulk created by a corrugated or ridged  
15           structure as further shown in Figure 2. In that way, the tissue may exhibit a high degree of bulk and a high degree of flexibility. Thus, the tissues are bulky, yet not stiff. Since the textured tissue is plied between two smooth tissue plies, the surface feel of the textured tissue is not as critical to the overall performance of the tissue.

20           Modified wet pressed tissue (also known as MWP) is similar to wet pressed tissue except that dewatering is accomplished with an air press and the tissue is pressed to the Yankee with a fabric rather than with a felt. MWP processes are known to persons of skill in the art, and U.S. Patent Nos. 6,083,346; 6,096,169; and 6,080,279 are hereby  
25           incorporated by reference. MWP type tissues could be employed in the application of this invention. The web is pressed onto the Yankee with a fabric, so the tissue contacts the Yankee only at the fabric knuckles. In that way, the three dimensional structure is preserved. In general, MWP tissues are bulkier than wet pressed tissues.

Paper products prepared from an uncreped through-air drying process will typically possess relatively high levels of absorbent capacity, softness and caliper. In addition, because the process avoids the use of costly creping steps, tissues produced according to this process will  
5 generally be more economical to produce than creped tissues of similar composition and basis weight.

In conventional felted wet pressed tissue making processes, the wet tissue web is carried on a felt to the Yankee dryer. The felt and tissue web are pressed on the Yankee dryer to de-water the tissue web  
10 and adhere it to the Yankee dryer. The Yankee dryer completes the drying process and the tissue is creped from the Yankee surface using a doctor blade or other suitable device. See, for example, U.S. Patent Nos. 3,953,638; 5,324,575; 5,656,134; 5,685,954; and 5,690,788 which are each hereby incorporated by reference in their entirety as if  
15 fully set forth herein.

A process that produces a noncompressed sheet using can drying which may be employed in the present invention is described in U.S. Patent No. 5,336,373 to Scattolino et al., which is incorporated herein by reference.

20 Suitable textured tissue base sheets can also include embossed, microembossed, and microstrained base sheets. Various techniques for embossing tissues are provided in U.S. Patent No. 5,409,572 (Kershaw et al) and U.S. Patent No. 5,693,406 (Wegele et al), each of which are incorporated by reference into this specification. Additional prior art  
25 tissue structures include tissues described in the following U.S. Patents: U.S. Patent No. 5,556,509; 5,709,775; 5,776,312; 5,837,103; 5,871,887; 4,637,859; 4,529,840; 5,814,190; 5,846,379; 5,685,954; 5,690,788; 5,885,415; and 5,885,417. The specification and claims of these patents are incorporated into this specification by reference.

Processes for forming uncreped through-air dried webs are described in U.S. Patent Nos. 5,779,860 to Hollenberg et al. and 5,048,589 to Cook et al., both of which are assigned to the assignee of this invention and both of which are incorporated herein by reference. In  
5 such processes, through air drying is employed as shown in the Figures of Cook. As described and shown in Cook, a web is prepared by: (1) forming a furnish of cellulosic fibers, water, and a chemical debonder; (2) depositing the furnish on a traveling foraminous belt, thereby forming a fibrous web on top of the traveling foraminous belt; (3) subjecting the  
10 fibrous web to noncompressive drying to remove water from the fibrous web; and (4) removing the dried fibrous web from the traveling foraminous belt. The process described in Cook does not include creping and is referred to as an uncreped through-air drying process.

In general, the preferred basis weights of products range from  
15 about 5 to about 10 pound/2880 ft<sup>2</sup> per ply, yielding a finished basis weight for the structure of from about 15 to about 30 pound/2880 ft<sup>2</sup>. In some embodiments, the composite structure additionally may be treated with compositions which transfer to the skin during use to promote skin health.

20 There are several advantages to paper structures shown in this patent application. For example, tissue products with heterogeneous plies as shown in the invention of this application enhance the strength of the tissue without reducing the softness. Further, potentially harsh or irritating substances may be disguised or buried in the center of the  
25 tissue in order to provide a benefit to the user that may otherwise be perceived as an irritating substance.

Virucidal agents may be employed in this invention, and examples of such agents and their application are provided in one or more of the following U.S. Patents which are incorporated by reference into this  
30 application: U.S. Patent No. 4,355,021 (Mahl et al); U.S. Patent No.

4,764,418 (Kuenn et al); U.S. Patent No. 4,828,912 (Hossain et al);  
U.S. Patent No. 4,975,217 (Brown-Skrobot et al); and U.S. Patent No.  
4,738,847 (Rothe et al).

Thus, "UCTAD" refers to uncreped through air dried tissue. The  
5 tissue is dried by blowing hot air through the web, rather than by contact  
with a Yankee dryer. Stretch is imparted to the tissue by means of a  
rush transfer rather than by creping. It produces a bulkier tissue than  
conventional wet pressed (CWP) processes, in most cases. Two  
references describing the UCTAD process which are hereby  
10 incorporated by reference include EP 0 677 612 A2 (Wendt et al) and EP  
0 631 014 B1 (Farrington, Jr. et al.).

In many cases, it is possible to increase the basis weight of the  
tissues in an attempt to increase the tactile impression of substance.  
However, increasing the basis weight of webs sometimes provides little  
15 improvement in the tactile impression of substance at the cost of  
increased stiffness of the tissue.

Textured tissue webs, especially those produced by the UCTAD,  
MWP yield a tissue with a significant tactile impression of substance and  
resilience. The structure of these webs tends to be defined by a plurality  
20 of dome-like structures, in some cases. In some embodiments, the  
structure is a corrugated-like or ridged middle ply having increased  
caliper or thickness, and greater bulk. These structures provide a large  
amount of external bulk to the overall tissue, with low stiffness. Reduced  
or diminished stiffness is a significant advantage in tissues. In this  
25 invention, by placing a ply of the above described textured base sheet  
between two plies of smooth soft base sheet, a tissue sandwich with a  
smooth surface and tactile impression of substance and resilience may  
be produced. Such a tissue is a significant advance over the prior art  
tissues.

There are generally at least two means of achieving a middle ply and surface enhancement. One means is by structural modifications of the tissue, and the other means is by chemical means. One embodiment of this invention shows a permeable first outer ply, an absorbent middle  
 5 ply and a permeable second outer ply. Thus, a tissue product may be produced having in essence the same structure but two permeable plies instead of one.

Current tissue products with enhanced softness such as the Kleenex® ColdCare® product line have multiple plies which are generally  
 10 structurally equivalent to each other.<sup>1</sup> Current prior art includes methods of treating the outer two plies topically. In some cases, a softer thicker tissue can be achieved in this invention by creating a thicker middle ply, wherein the thicker middle maybe comprised of a secondary fiber. Secondary fibers are advantageous for middle plies because they are  
 15 relatively inexpensive. U.S. Patent No. 5,350,624 describes secondary fibers and how they may be used, and that patent is hereby incorporated by reference into this disclosure. Further, since the middle ply does not contact the skin of the user, inexpensive materials are not a disadvantage when such a multi-ply structure is used. In many cases, a  
 20 softer and thicker tissue can be achieved by producing a ply comprised partly or entirely of foam. The preferred foam in that embodiment would be a polymeric foam such as may be provided in sheet form. The sheet or sheets could be from about 0.01 to about 1 cm in thickness. The sheets could be perforated or slit, either to enhance absorption.

25 Suitable absorbent foams may be provided using high internal phase emulsions ("HIPE"), such as that described in U.S. Patent No. 5,795,921 to Dyer et al. Further, crosslinked polyurethane foams also could be employed in the practice of the invention.

---

<sup>1</sup> ColdCare® and Kleenex® are registered trademarks of the Kimberly-Clark Corporation.

Additionally, activated carbon also could be employed in one or more layers of the tissue. In particular, activated carbon may be advantageously applied to the middle layer. Activated carbon or activated charcoal is available from commercial sources under trade names such as Calgon CPG®, PCB®, Type SLG®, Type CAL®, and Type OL®, each of which is available from the Calgon Carbon Corporation.

In some cases, it is possible to use Coform as a middle ply to increase the overall substance and absorbency in the tissue. "Coform" refers generally to web plies produced as described below. When coformed web plies are utilized, the coforming techniques disclosed in U.S. Patent No. 4,100,324 to Anderson et al., which is incorporated by reference, may be used.

A coformed nonwoven web is formed by combining in a gas stream a mixture of meltblown thermoplastic and other fibers such as wood pulp or staple fibers. In the technique of making Coform, the thermoplastic and other fibers are combined prior to the combined fibers being collected on a forming wire to form a coherent web of randomly dispersed fibers. A typical coformed nonwoven web may comprise about 65% by weight cellulosic fibers and about 35% by weight thermoplastic fibers, although this ratio may be varied to achieve various desirable properties in such coformed webs. When the present resulting laminate is formed, the laminate may comprise about 50% by weight synthetic fibers and about 50% by weight cellulosic fibers, with other ratios also being suitable.

The basesheet of the tissue formed using Coform has high integrity and absorbency. Another reference describing products and processes of this type which use a textile staple fiber are shown in U.S. Patent No. 4,426,417 (incorporated by reference) issued to Meitner et al.



Calendering is a commonly used practice of pressing webs press rolls arranged successively. The term "calender" refers to a process for producing fabrics, nonwoven webs, tissue, paper and the like that reduces the caliper, or thickness, of such web and imparts surface effects. Such surface effects may be increased gloss or smoothness. In general, the process of calendering includes passing the web through two or more heavy rollers which are sometimes heated.

As persons of skill in the art will be aware, numerous conventional methods or techniques exist for embossing or calendering the tissue.

For example, EP 0 566 755 A1 and EP 0739 708 A2 (incorporated by reference) describe embossing techniques in general, and also wall angle of female embossing elements to achieve better pattern definition and higher bulk. Further, EP 0688 152 B1 (incorporated by reference) describes conventional techniques of microembossing. U.S. Patent No. 5,904,812 (incorporated by reference) to Salman et al describes techniques of processing the web by consecutively calendering and embossing.

Chemical modifications to the middle plies or to adjacent surfaces of the outer plies surfaces may be performed in many ways. Various chemical modifications include spraying, printing, wet-end addition and embossing.

Figure 3 shows various ways that chemical modifications could be provided. Chemically modified tissues 20 are shown. Chemically modified tissue 21 includes a uniform and even distribution of chemical substance to the tissue 23. It can be seen in Figure 3 that in this instance the chemical modification extends all the way to the tissue perimeter 22. Chemically modified tissue 24, on the other hand, contains a chemical modification applied only to the center portion of the tissue as seen in elliptical zone 25. A further example is seen in chemically modified tissue 26, which contains a circular zone 27.

Conventional wet pressed tissue plies used in the following examples showed a basis weight of about 7.5 lbs/2880 ft<sup>2</sup> and a geometric mean tensile of about 850 grams/3-inches (measured as three plies).

5

### **MWP**

"MWP" refers to a modified wetpressed tissuemaking process. In a typical process a low consistency pulp furnish is provided in a pressurized headbox. The headbox has an opening for delivering a thin deposit of pulp furnish onto a formainous forming fabric to form a wet web. The web is then typically dewatered to a fiber consistency of about 30% to 40% (total web weight basis) by a noncompressive dewatering means such as an air press. The term "noncompressive dewatering" refers to dewatering methods that do not involve compressive nips or other steps causing significant densification or compression of a portion of the web during the dewatering process. The dewatered web is then transferred to a molding fabric. The molded and dewatered web is then pressed against the surface of a heated drying cylinder, such as a Yankee dryer, to dry the web. The web may optionally be creped. In the case of a creped web, the web is adhered to the heated drying cylinder by the pressing forces and adhesive. When the web is dry it is scraped from the Yankee dryer with a doctor blade. Creping shortens and softens the resulting web. MWP webs are considered to be generally noncompacted since the web is compressed only at the knuckles of the molding fabric, resulting in large noncompressed areas and a bulkier web. MWP webs also tend to be resilient because structure is molded into webs before they are dried.

25

MWP plies used in the examples were produced with an Appleton Brand Wire T216-3A molding fabric. Basis weight was about 10.25 lbs/2880 ft<sup>2</sup> and geometric mean tensile was about 1470 grams/3-inches (measured as 2-ply).

30

00712008-14400  
00712008-14400

## **UCTAD**

The term UCTAD refers to an uncreped through air dried  
tissuemaking process. Through air dried is sometimes abbreviated  
simply as "TAD". In a typical process, a low consistency pulp furnish is  
5 provided in a pressurized headbox. The headbox has an opening for  
delivering a thin deposit of pulp furnish onto a foraminous forming fabric  
to form a wet web. The web is then typically dewatered to a fiber  
consistency of between about 7% and about 25% (total web weight  
basis) by vacuum dewatering. The wet web is then transferred to a  
10 transfer fabric which is typically traveling at a speed 20% to 40% slower  
than the forming fabric. This imparts machine direction stretch to the  
finished web. The web is then transferred to a throughdryer/molding  
fabric. The web is the simultaneously dried by one or more through air  
dryers and molded to the surface conformation of the fabric. The dried  
15 web is then wound into rolls for converting into product UCTAD webs  
are considered to be non-compacted since the web is subjected to  
minimal mechanical compressional forces while the fibers are moist, and  
the web is dried by a non-compressive means. UCTAD webs tend to be  
bulkier and more resilient than CWP webs.

20 UCTAD plies used in the examples were produced with an  
Appleton Brand Wire T1205-1 throughdryer/molding fabric. Basis weight  
was about 11 lbs/2880 ft<sup>2</sup>, geometric mean tensile was about 1000  
grams/3-inches (measured as 2 plies), and caliper was about 0.0020-  
inch (measured as 2 plies).

25

## **Fabricless TAD**

It is possible to form a through air dried tissue (TAD) without  
employing a forming fabric. When such a process is employed, it is  
deemed or called "fabricless TAD".

30

0047T "0087260

**EXAMPLE 1**

A multi-ply tissue is provided having a first outer ply of CTEC and a second outer ply of CWP. Furthermore, the middle ply is provided using an uncreped through air dried tissue (UCTAD). To denote tissues in the following examples, the abbreviation or designations will read from left to right, from one outer ply to another outer ply, as such:

CWP / UCTAD / CWP, which denotes CWP as a first outer ply, UCTAD as a middle ply, and another CWP as the second outer ply.

**EXAMPLE 2**

In this example, a three ply tissue is manufactured as above described, except that the three layer structure comprises:  
UCTAD / CWP / UCTAD.

**EXAMPLE 3**

In this example, a three ply tissue is manufactured as above described, except that the three layer structure comprises:  
MWP / CWP / MWP.

**EXAMPLE 4**

In this example, a three ply tissue is manufactured as above described, except that the three layer structure comprises:  
CWP / MWP / MWP.

**EXAMPLE 5**

In this example, a three ply tissue is manufactured as above described, except that the three layer structure comprises:  
Fabricless TAD / CWP / Fabricless TAD.

**EXAMPLE 6**

In this example, a three ply tissue is manufactured as provided as described, except that the three layer structure comprises:  
CWP / Fabricless TAD / CWP.

5

**EXAMPLE 7**

In this example, a three ply tissue is made so as to provide a three layer structure comprising:

10 MWP /UCTAD/ MWP.

**EXAMPLE 8**

Prototype three ply tissues were printed with a lotion formulation  
15 having the following properties:

	<u>Ingredient</u>	<u>Approximate Percentage (%)</u>
	Prolipid 141 (International Specialty Products)	2.00
	Avocado oil (Alnoroil)	2.00
20	Soya sterol	0.80
	Vitamin E acetate (Roche)	0.30
	Petrolatum (Ultra Chemical)	8.00
	Propylene glycol	30.80
	Glycerin	5.00
25	Aloe vera powder (Terry labs)	0.10
	PEG 8000 (Union Carbide)	20.00
	Behenyl alcohol (Glenn Chemical)	10.00
	Stearyl alcohol (Glenn Chemical)	10.00
	Dimethicone 100 Cst (Dow Corning)	10.00
30	DC 1428 (Dow Corning)	1.00

Linespeed was about 1500 ft/minute, processing temperature was about 140° F, and the gravure rolls were 5.4 cbm/1.5 cbm striped rolls. Target add-on was 8% based on the weight of the treated tissue. Offset printing was employed.

5

#### **EXAMPLE 9**

The formulation of Example 8 was employed in preparing the Examples 9 and 10.

UCTAD /CWP/ UCTAD

10

This prototype has relatively low GMT, but is thick and heavy with an evident lotiony feel.

#### **EXAMPLE 10**

15 The formulation of Example 7 was used, also employing the following structure:

CWP /UCTAD/ CWP

20 This prototype has relatively low GMT, but is thick and heavy, with an evident lotiony feel. The combination of out-facing smooth plies with internal cushion is quite different from 3-ply CWP product. Properties of this 3 ply tissue were as follows:

25	Basis Weight:	28.8 lb/2880 ft <sup>2</sup>
	Caliper:	0.012 inches
	GMT:	691 grams/3-inches

30 These and other modifications and variations to the present invention may be practiced by those of ordinary skill in the art without departing from the spirit and scope of the invention. The invention is

5

**What is claimed is:**

1. A composite tissue structure having at least three plies,  
comprising:
  - (a) a permeable first outer ply;
  - 5 (b) a middle ply; and
  - (c) a permeable second outer ply, the middle ply being positioned  
between the first and second outer plies;
  - (d) wherein the middle ply has a thickness greater than the  
thickness of either the first or the second outer ply, further wherein the  
10 middle ply comprises a bulk that is greater than the bulk of either the first  
or second outer ply.
2. The tissue of claim 1 in which the middle ply comprises  
uncreped through-air-dried tissue (UCTAD).
3. The tissue of claim 1 in which the middle ply comprises  
modified wet pressed tissue (MWP).
4. The tissue of claim 1 in which the middle ply comprises through  
air dried tissue (TAD).
5. The tissue of claim 1 in which the middle ply comprises a fabric  
-less through air dried tissue.
6. The tissue of claim 1 in which the middle ply provides a  
corrugated-like structure providing increased bulk to the composite tissue  
structure.
7. The tissue of claim 1 in which the middle ply additionally  
comprises an absorbent foam.



8. The tissue of claim 1 in which at least one outer ply is creped during manufacture of the tissue.

9. The tissue of claim 1 in which a middle ply comprises a corrugated-like structure having increased thickness and bulk.

10 The tissue of claim 1 in which the tissue is calendered.

11. The tissue of claim 1 in which the middle ply further comprises activated carbon.

12. The tissue of claim 1 in which the middle ply further comprises an absorbent foam.

13. A throughdried tissue having at least three plies, comprising:

(a) a permeable first outer ply;

(b) at least one middle ply; and

5 (c) a second outer ply, the second outer ply lying adjacent the middle ply or plies, wherein the middle ply is between the first outer ply and the second outer ply;

(d) wherein the middle ply has a thickness and bulk greater than the outer plies;

10 (e) further wherein the first outer, middle, and second outer plies are joined to form at least a three ply tissue;

(f) the tissue having at least one ply that receives a chemical enhancement.

14. The tissue of claim 12 in which the chemical enhancement comprises foam applied to the middle ply.

15. The tissue of claim 12 in which the chemical enhancement comprises activated carbon applied to the middle ply.

16. A method of manufacturing a tissue having at least three plies, the method comprising:

(a) providing a permeable first outer ply;

5 (b) providing a thick middle ply having greater bulk than the first outer ply;

(c) providing a permeable second outer ply;


(d) administering to the middle ply or plies one or more chemical agents selected from the following agents: activated carbon, antibacterial agents, and foam; and

10 (e) joining the first outer ply, middle plies/ply, and second outer ply together to form a tissue.

09712600-11400

7 4 1

1997-1998		1998-1999		1999-2000		2000-2001		2001-2002		2002-2003		2003-2004		2004-2005		2005-2006		2006-2007		2007-2008		2008-2009		2009-2010		2010-2011		2011-2012		2012-2013		2013-2014		2014-2015		2015-2016		2016-2017		2017-2018		2018-2019		2019-2020		2020-2021		2021-2022		2022-2023		2023-2024		2024-2025		2025-2026		2026-2027		2027-2028		2028-2029		2029-2030		2030-2031		2031-2032		2032-2033		2033-2034		2034-2035		2035-2036		2036-2037		2037-2038		2038-2039		2039-2040		2040-2041		2041-2042		2042-2043		2043-2044		2044-2045		2045-2046		2046-2047		2047-2048		2048-2049		2049-2050		2050-2051		2051-2052		2052-2053		2053-2054		2054-2055		2055-2056		2056-2057		2057-2058		2058-2059		2059-2060		2060-2061		2061-2062		2062-2063		2063-2064		2064-2065		2065-2066		2066-2067		2067-2068		2068-2069		2069-2070		2070-2071		2071-2072		2072-2073		2073-2074		2074-2075		2075-2076		2076-2077		2077-2078		2078-2079		2079-2080		2080-2081		2081-2082		2082-2083		2083-2084		2084-2085		2085-2086		2086-2087		2087-2088		2088-2089		2089-2090		2090-2091		2091-2092		2092-2093		2093-2094		2094-2095		2095-2096		2096-2097		2097-2098		2098-2099		2099-2100		2100-2101		2101-2102		2102-2103		2103-2104		2104-2105		2105-2106		2106-2107		2107-2108		2108-2109		2109-2110		2110-2111		2111-2112		2112-2113		2113-2114		2114-2115		2115-2116		2116-2117		2117-2118		2118-2119		2119-2120		2120-2121		2121-2122		2122-2123		2123-2124		2124-2125		2125-2126		2126-2127		2127-2128		2128-2129		2129-2130		2130-2131		2131-2132		2132-2133		2133-2134		2134-2135		2135-2136		2136-2137		2137-2138		2138-2139		2139-2140		2140-2141		2141-2142		2142-2143		2143-2144		2144-2145		2145-2146		2146-2147		2147-2148		2148-2149		2149-2150		2150-2151		2151-2152		2152-2153		2153-2154		2154-2155		2155-2156		2156-2157		2157-2158		2158-2159		2159-2160		2160-2161		2161-2162		2162-2163		2163-2164		2164-2165		2165-2166		2166-2167		2167-2168		2168-2169		2169-2170		2170-2171		2171-2172		2172-2173		2173-2174		2174-2175		2175-2176		2176-2177		2177-2178		2178-2179		2179-2180		2180-2181		2181-2182		2182-2183		2183-2184		2184-2185		2185-2186		2186-2187		2187-2188		2188-2189		2189-2190		2190-2191		2191-2192		2192-2193		2193-2194		2194-2195		2195-2196		2196-2197		2197-2198		2198-2199		2199-2200		2200-2201		2201-2202		2202-2203		2203-2204		2204-2205		2205-2206		2206-2207		2207-2208		2208-2209		2209-2210		2210-2211		2211-2212		2212-2213		2213-2214		2214-2215		2215-2216		2216-2217		2217-2218		2218-2219		2219-2220		2220-2221		2221-2222		2222-2223		2223-2224	
-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--

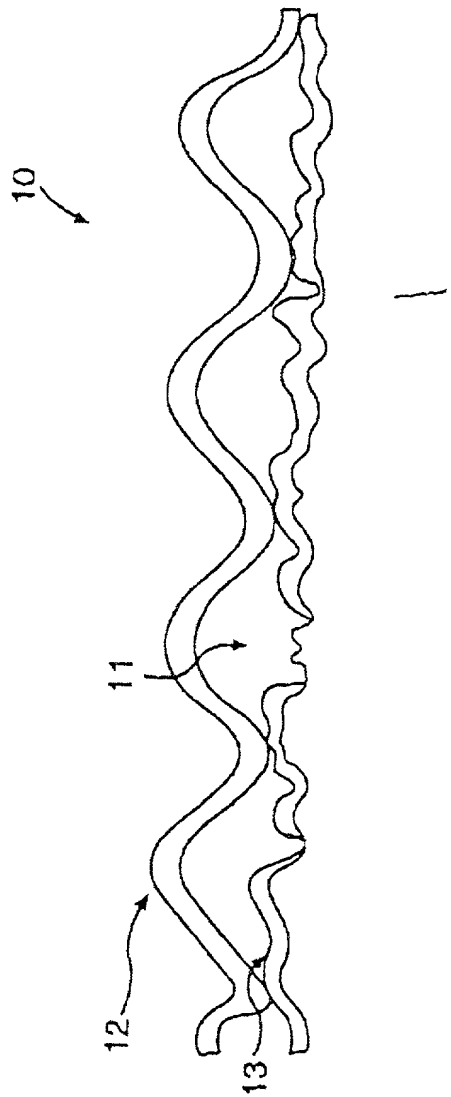

**FIG. 1**  
PRIOR ART

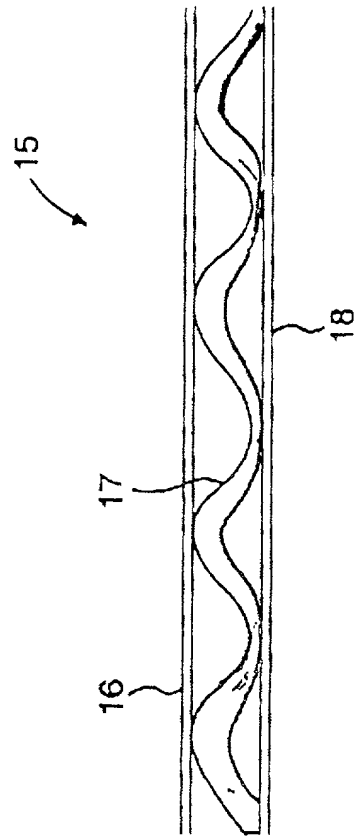


FIG. 2

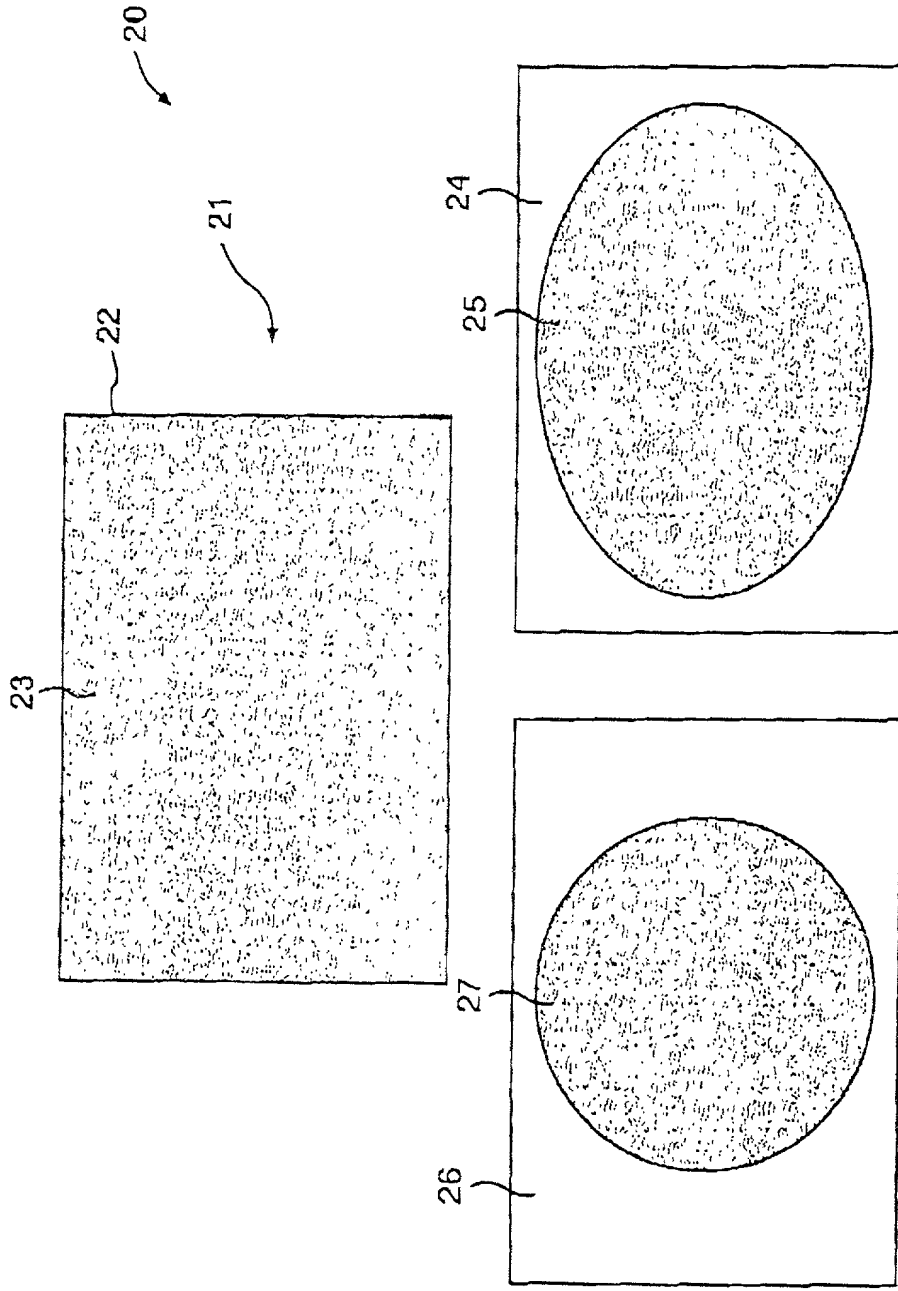


FIG. 3